

# TRUCK CHASSIS MZKT-750004

### **SPECIFICATIONS**

16 300

29 700

## PERFORMANCE DATA

Weight of mounted equipment, kg

Wheel drive	8x8
Max. speed, km/h	80
Turning radius, m	18,5
Fuel tank capacity, I	500

#### WEIGHT DATA

Curb vehicle data, kg	16 300
Gross vehicle weight, kg	46 000
Permissible weight on axles, kg	
on 1-2 axles	2x10 000
on 3-4 axles	2x13 000

#### ENGINE

Ecology		EURO-V
Number and locati	on of cylinders	L6
Max. power	308,8 kW (420 h.)	o.) at 1900 min <sup>-1</sup>
Max. torque	1 985 Nm at 1	L100-1300 min <sup>-1</sup>

#### CLUTCH

Single-disc

### TRANSMISSION

Type manual Model MZKT-700600 Number of gears 9 forward, 1 reverse 10.08-0.79; R9.55 Gear ratio

#### DRIVING AXLES

Rigid, with central reduction gears, interaxle and cross-axle differential lock

1st and 2nd axles-steered

#### **AXLE SUSPENSION**

1st and 2nd axles - dependent leaf-spring 3rd and 4th axles - dependent spring-balanced

#### BRAKE SYSTEM

Drum brakes of shoe-type with pneumatic drive Dual-circuit system Engine brake **ABS** 

#### **TYRES**

16.00R20, offroad Central tyre inflation system (CTIS) Single wheels Number of wheels - 8+1

#### **FRAME**

Longitudinal Equipped with two front and one rear towing units, rear protection unit

#### CAB


2-seat full-metal Equipped with ventilation and heating systems Driver and passenger seats - air-suspended

### **ELECTRICAL EQUIPMENT**

Nominal voltage 24V Single-wire Batteries 2x190 Ah

## OPTIONS

Liquid engine heater Battery container with heating Autonomous cab heater Air-conditioner

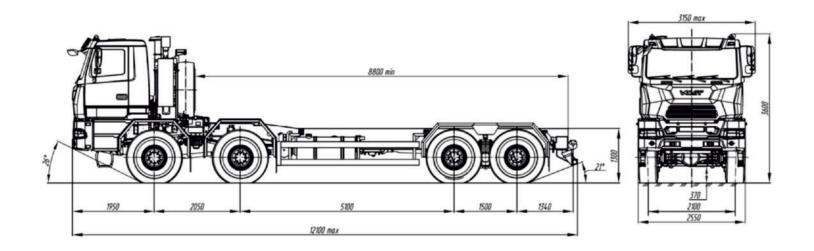

www.mzkt.by